

Fig. 1

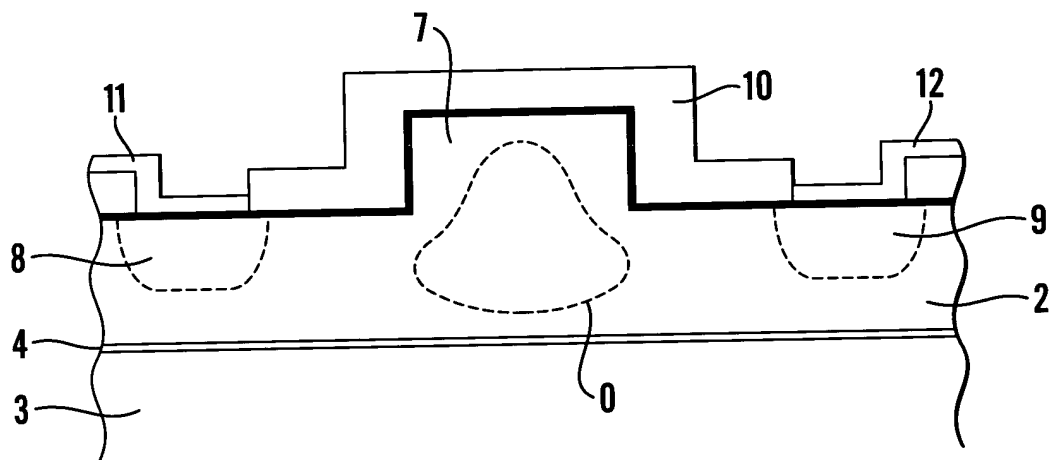


Fig. 2

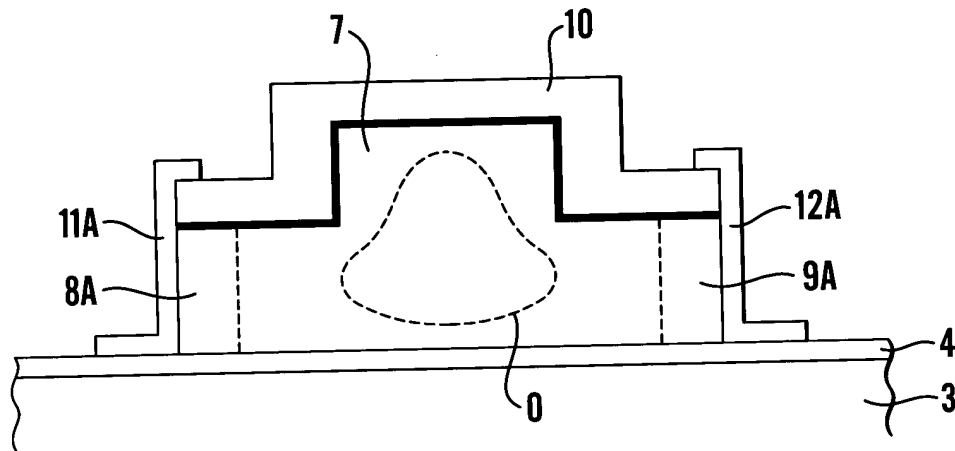


Fig. 3

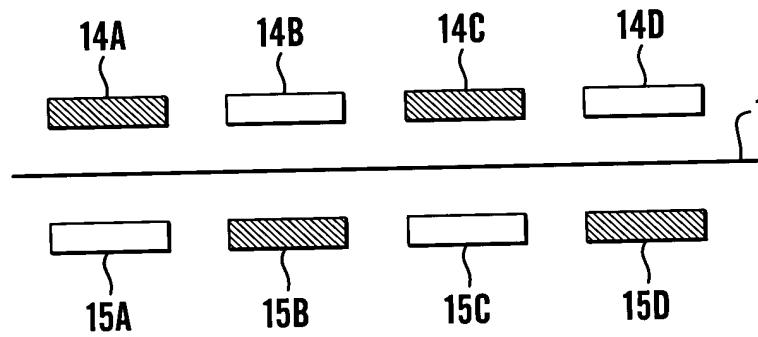


Fig. 4

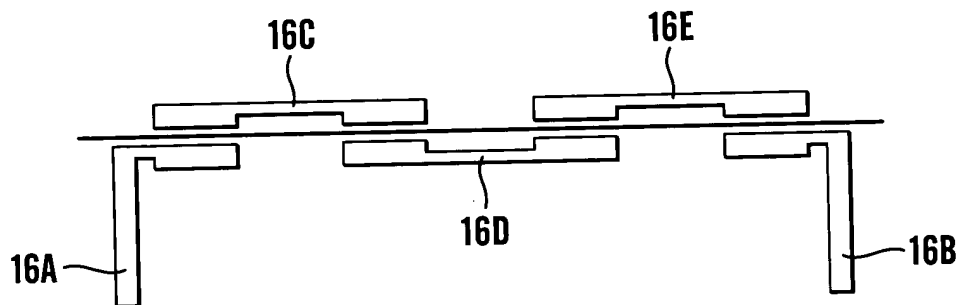


Fig. 5

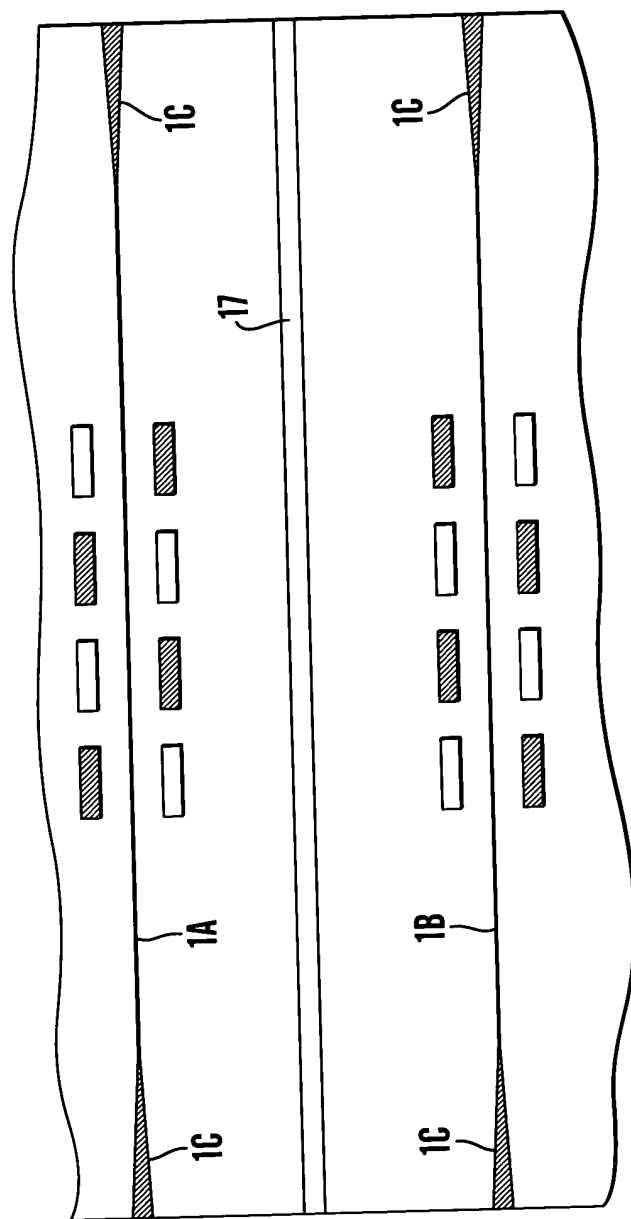


Fig.6

Fig. 7

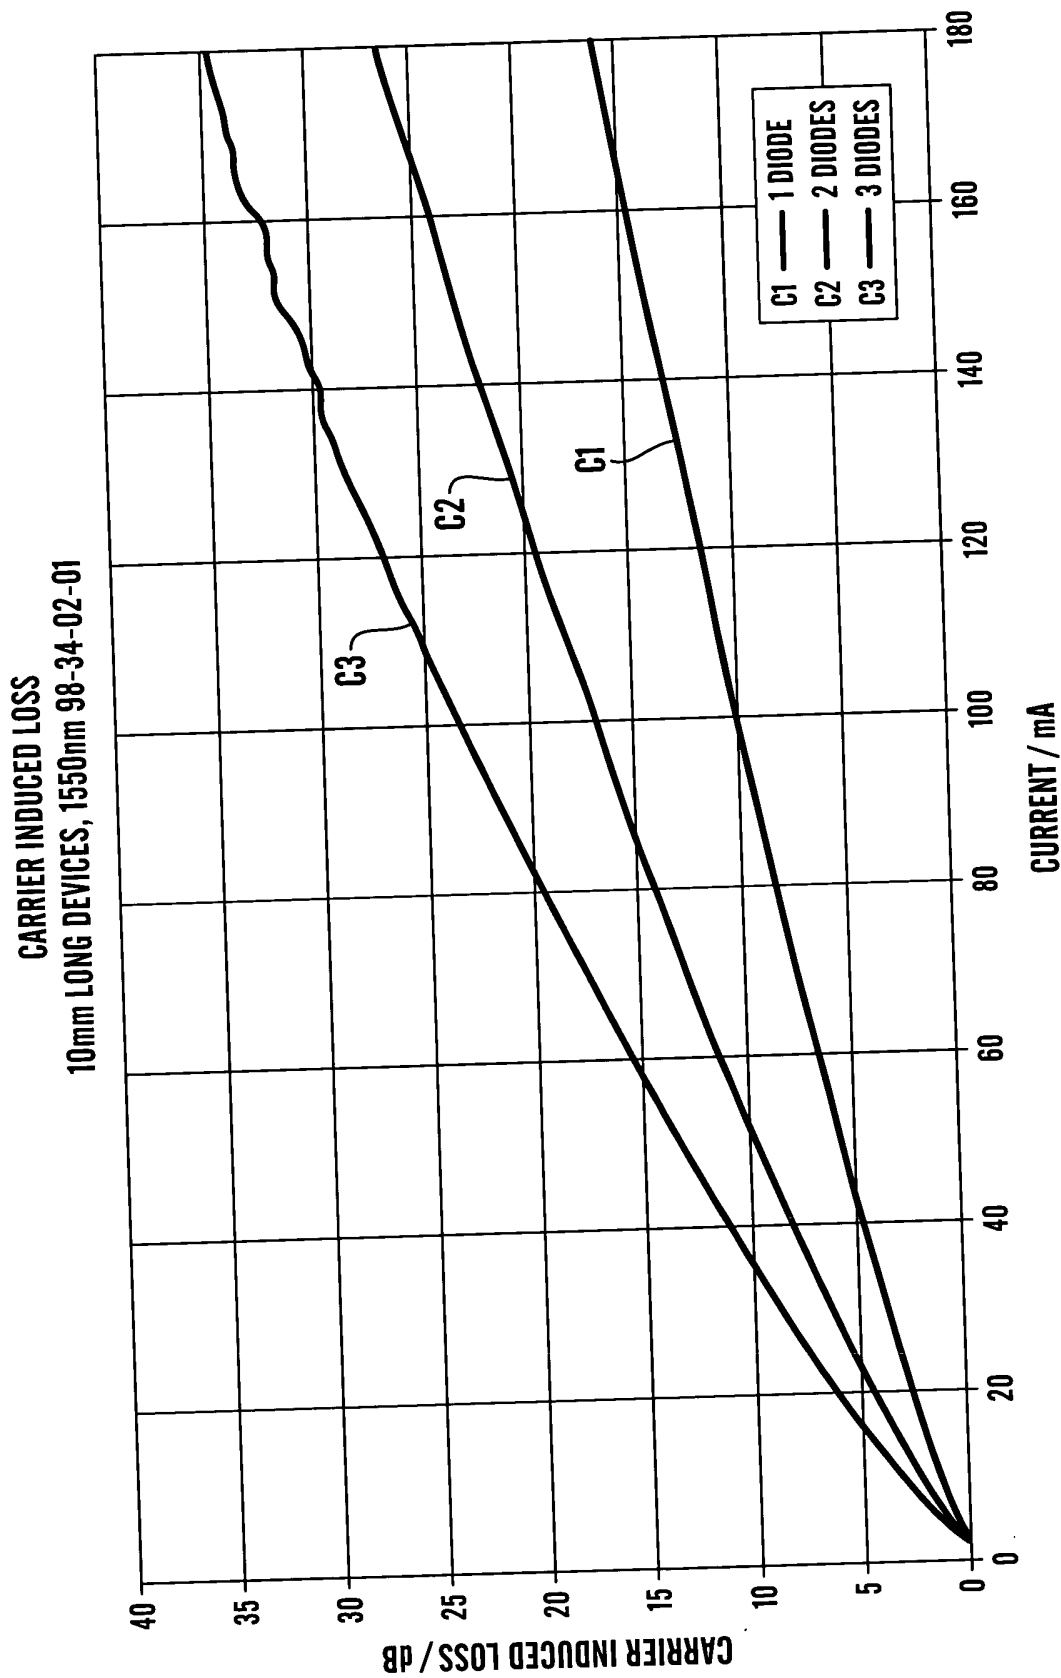


Fig. 8

CARRIER INDUCED LOSS
10mm LONG DEVICES, 1550nm 98-34-02-01

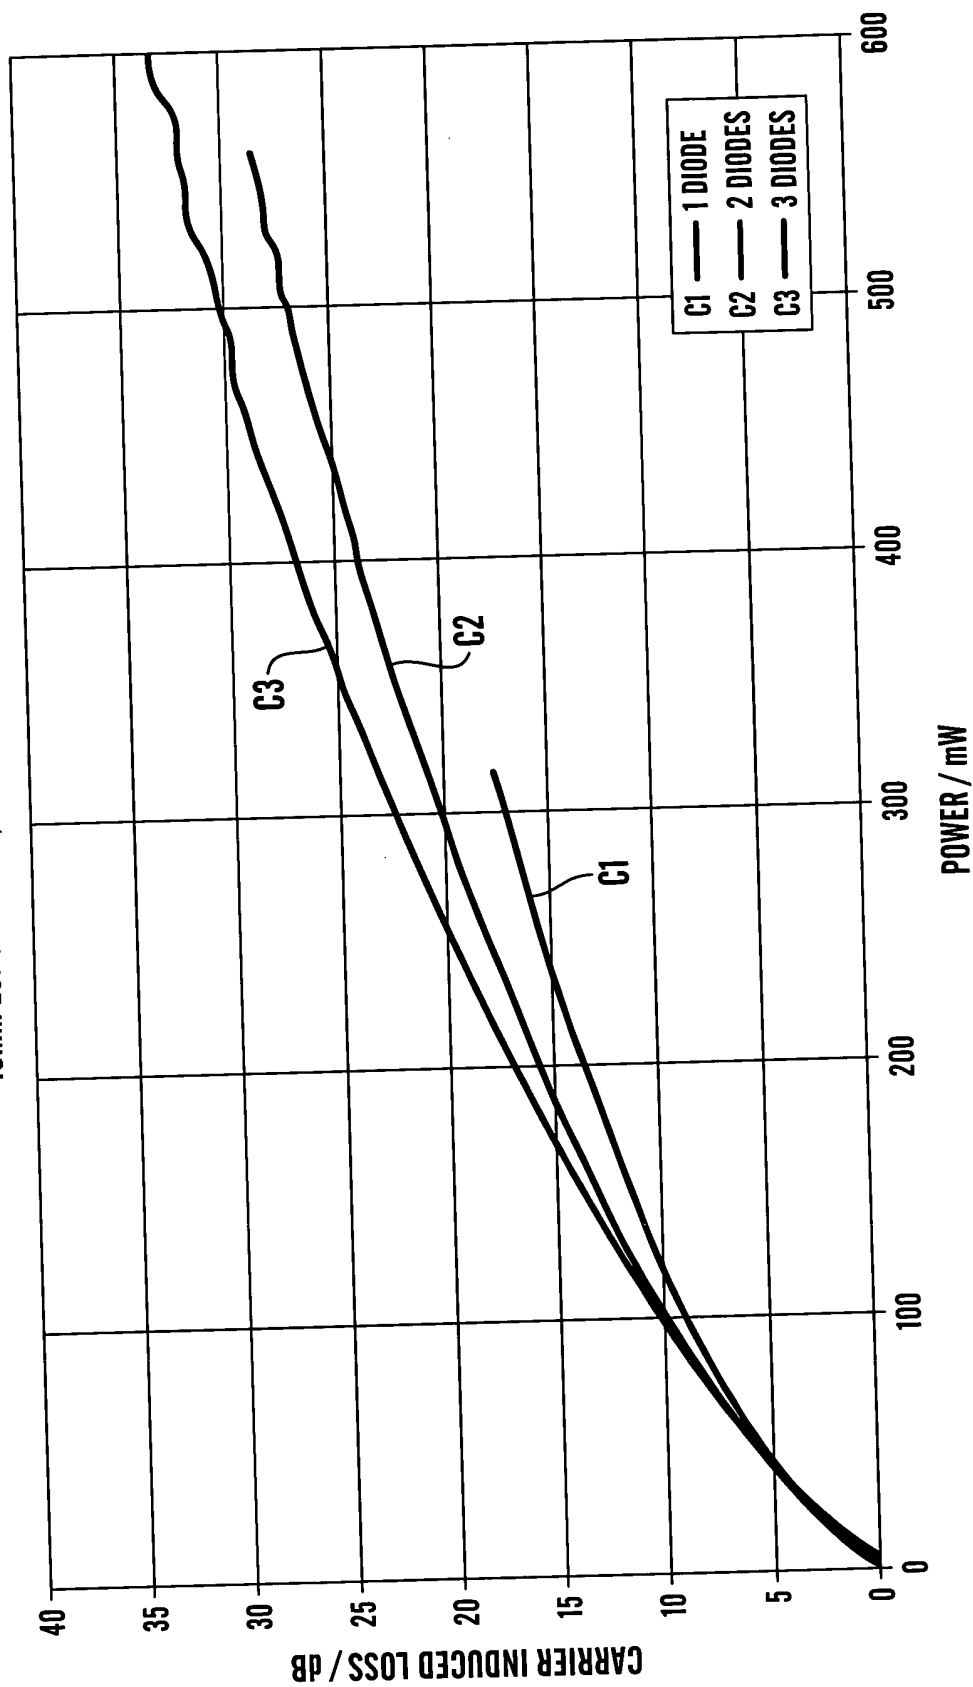


Fig.9

99-24-04-03 ATTENUATION-CURRENT CHARACTERISTICS D33

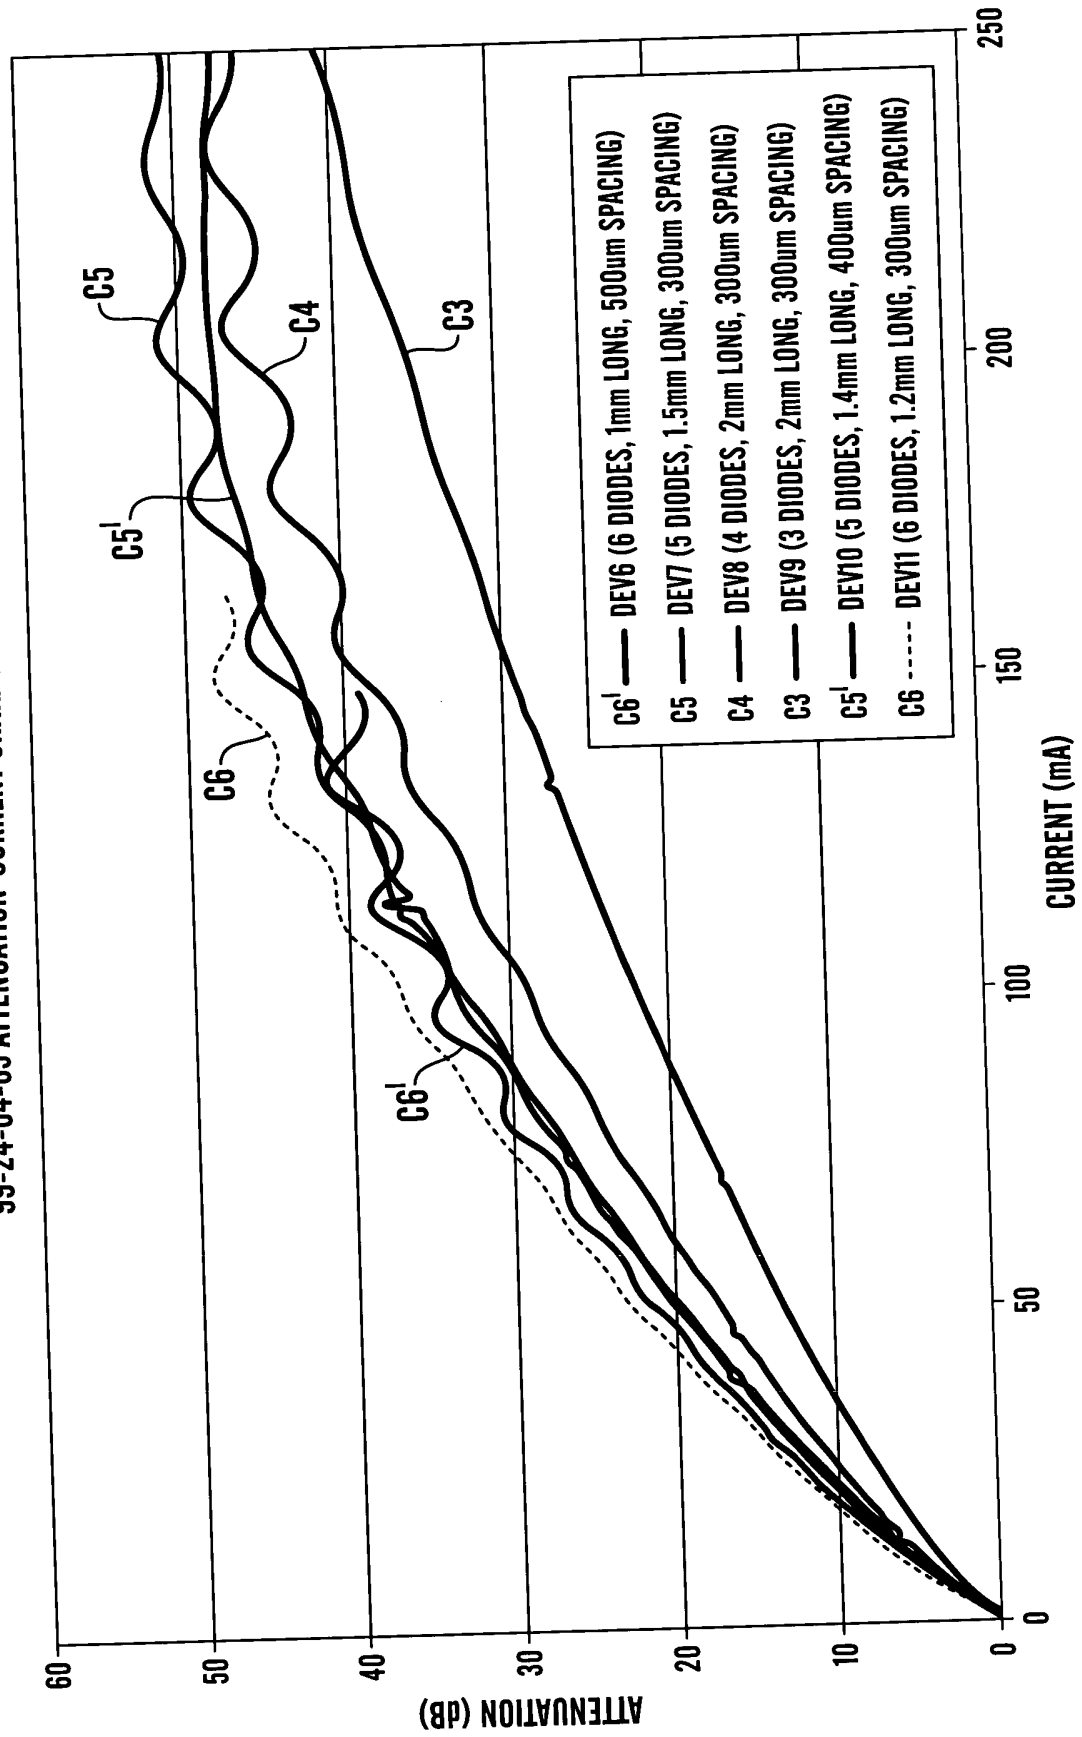
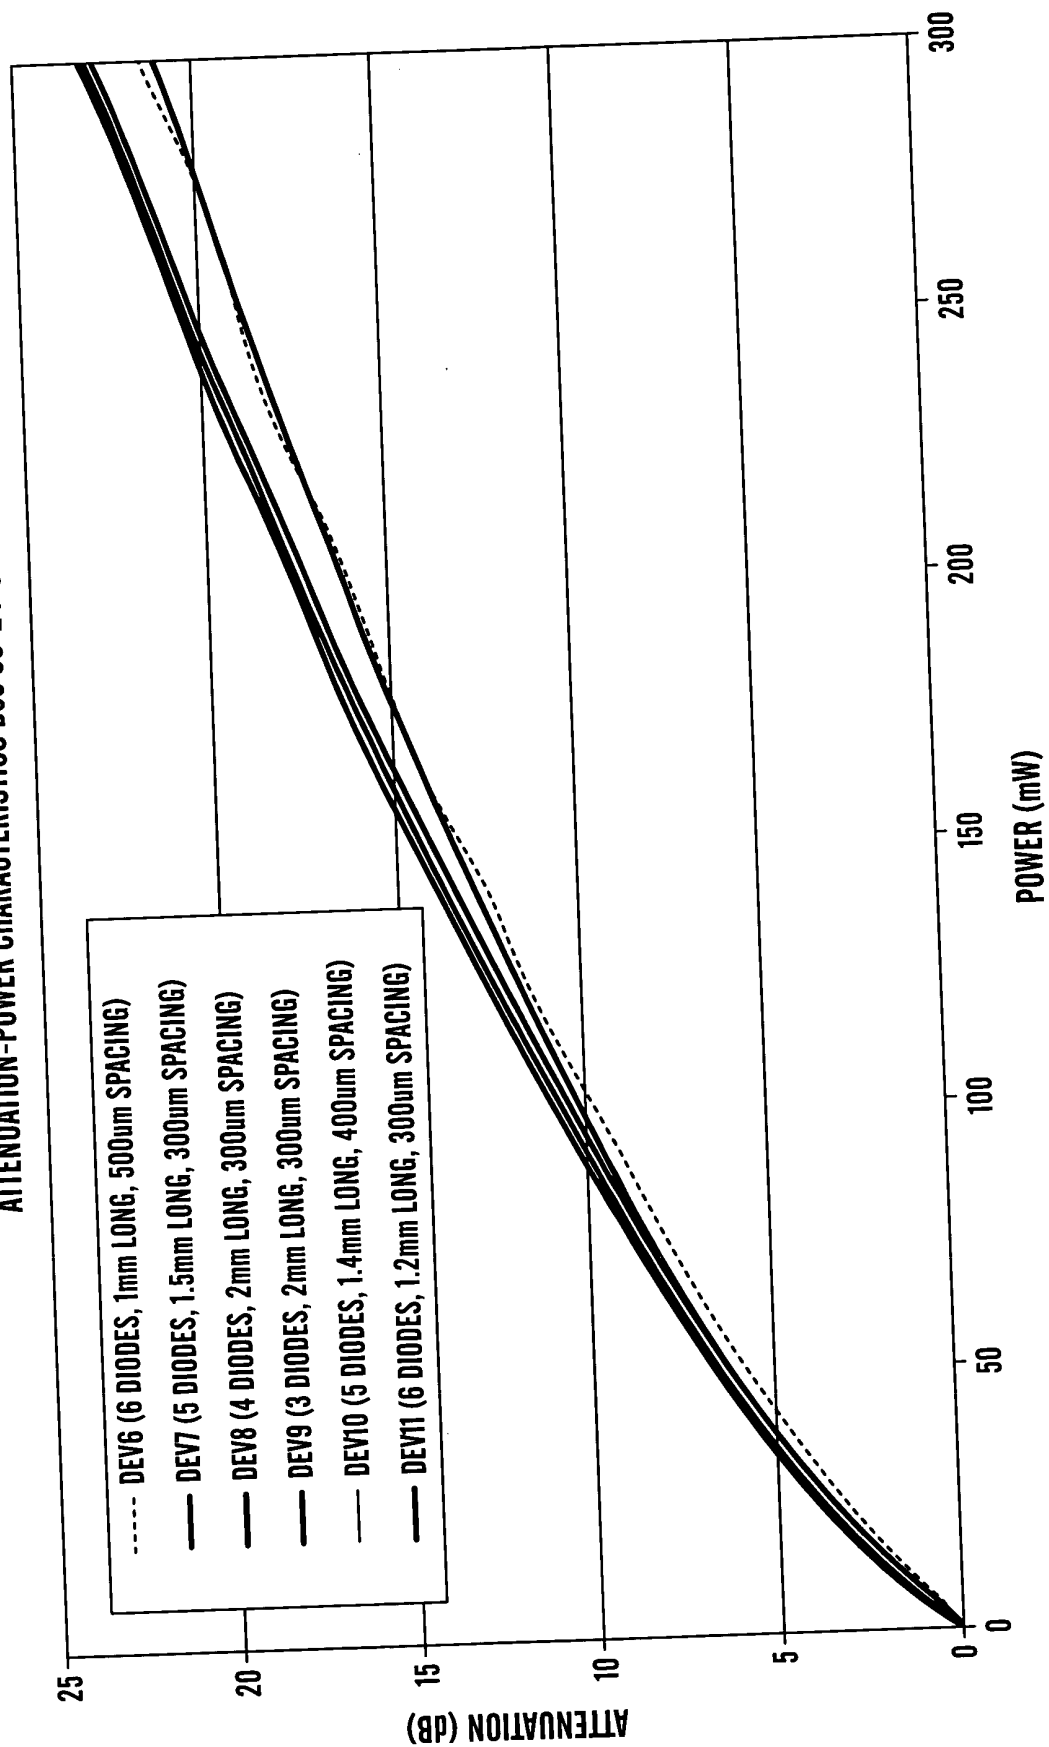


Fig.10

ATTENUATION-POWER CHARACTERISTICS D33 99-24-04-03



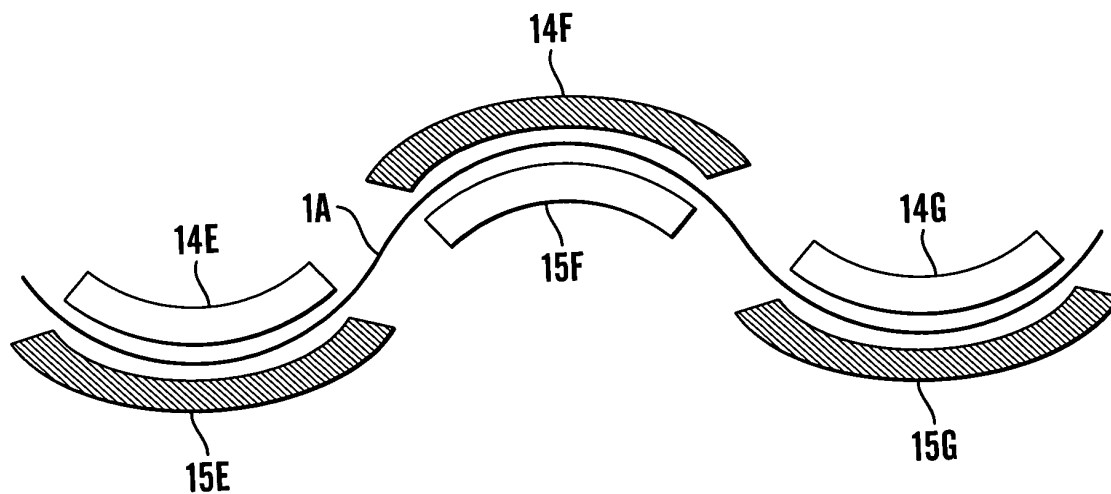


Fig. 11

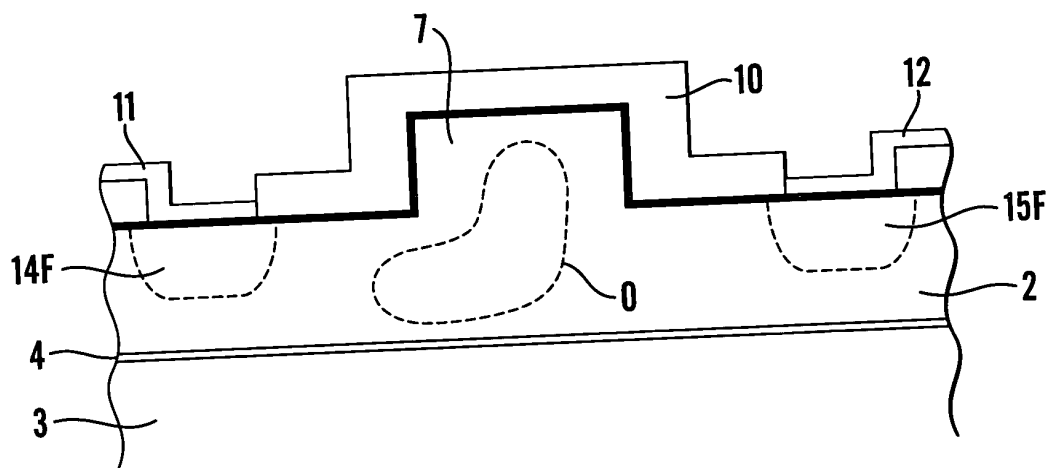


Fig. 12